

STIEBEL ELTRON

Simply the Best

Proven Point-of-Use Dependability

Exclusive copper-clad
heating element



DHC Series

POINT-OF-USE

TANKLESS ELECTRIC WATER HEATERS



ISO 9001
CERTIFIED



- › Unlimited Supply of Hot Water
- › Hydraulically Controlled for Quiet Operation
- › Sleek Design Saves Space
- › Major Energy Savings
- › Proven Reliability

800.582.8423

www.stiebel-eltron-usa.com

Ideal For All Point-of-Use Water Heating Applications

Stiebel Eltron DHC tankless electric water heaters are the ideal choice for all point-of-use hand washing applications:

Commercial › Industrial › Institutional

- › Office buildings
- › Stores
- › Malls
- › Warehouses
- › Restaurants
- › Gas stations
- › Schools
- › Hotels/Motels
- › Commercial condominiums
- › Manufacturing facilities


Residential

- › Bathroom sinks
- › Kitchen sinks
- › Laundry areas
- › Cabins/cottages

Stiebel Eltron DHC tankless water heaters are designed for installation at the point-of-use. The DHC heats water instantaneously as it flows through the unit. Stand-by heat losses are completely eliminated.

The heating element is controlled by a flow switch which means a DHC can never dry-fire and fail prematurely. And since all DHCs are hydraulically controlled, operation is quiet. DHC water heaters are equipped with a safety high-limit with manual reset. The rugged all copper design ensures many years of reliable service.

DHC 3-1, DHC 3-2 and DHC 4-2 models are shipped with 0.5 GPM pressure compensating flow reducer/aerators that fit on most faucets. Flow controls and faucet aerators are highly recommended in conjunction with tankless water heaters. No pressure relief valve, drains, or circulating pumps needed.

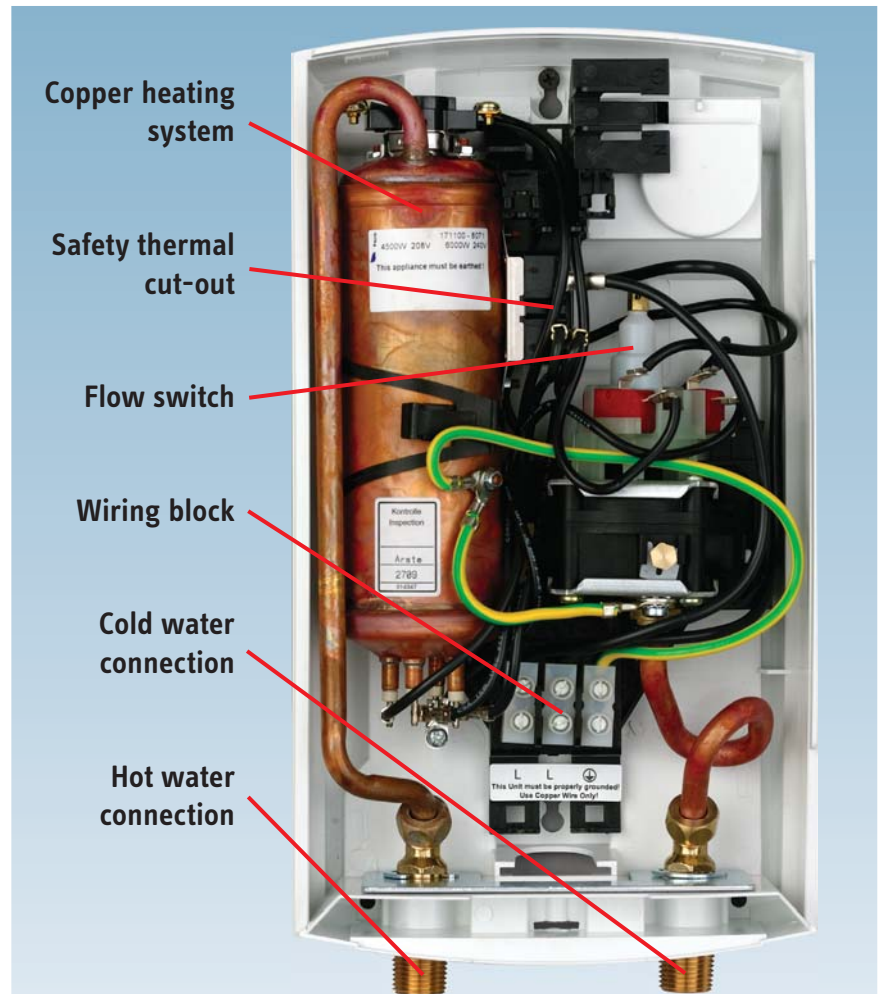

Engineer's Specifications: The tankless electric water heater shall be equipped with a copper sheathed heating element housed in a copper cylinder. The flow switch that operates the heating element shall be of the mechanical pressure differential type. The unit shall be equipped with a safety high-limit switch with manual reset. An integral tamper-proof flow adjustment screw shall be provided for the installer so that water flow rates can easily be adjusted. The water connections shall be designed for 1/2" NPT female adapter. The housing shall be made of high impact polycarbonate plastic.




DHC Sizing Guide Single Sink Tankless Electric Water Heater

		DHC MODEL									
Flow GPM		DHC 3-1	DHC 3-2	DHC 4-2	DHC 4-3	DHC 5-2	DHC 6-2	DHC 8-2	DHC 9-3	DHC 10-2	
		120 V Requires 25 A circuit breaker	240 V Requires 15 A circuit breaker	240 V Requires 20 A circuit breaker	277 V Requires 20 A circuit breaker	240 V Requires 20 A circuit breaker	240 V Requires 25 A circuit breaker	240 V Requires 30 A circuit breaker	277 V Requires 35 A circuit breaker	240 V Requires 40 A circuit breaker	
LAVATORY SINK	Std. 0.5	● ●		● ●							
	High 1.0					● ●		● ●		● ●	
	Non-code 2.0							● ●		● ●	
KITCHEN SINK	Low 1.0					● ●					
	Std. 2.0							● ●		● ●	
Utility / Janitor's Sink	1.0 -2.0							● ●		● ●	

DHC 3-1, 3-2, 4-2 ship with a 0.5 GPM pressure compensating flow reducer/aerator that must be installed.

Depend on them!

- Exclusive copper-clad heating element
- Electronically controlled for silent operation
- Never dry fires and fails prematurely
- Superior reliability

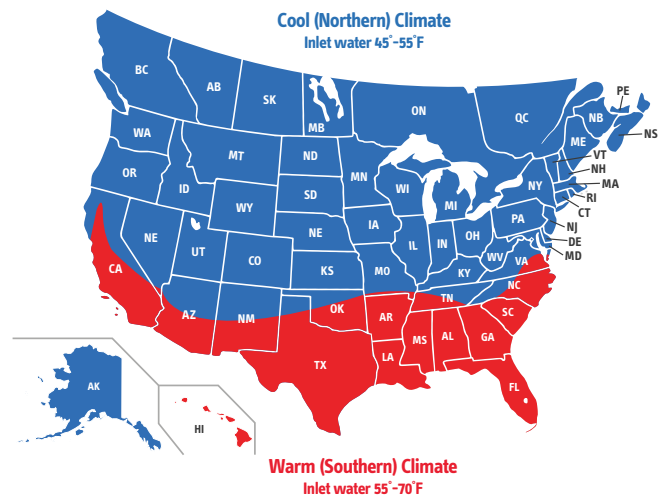

7 years leakage/
3 years parts.
Complete warranty
online.



Conforms to ANSI/UL
Std. 499
Certified to CAN/CSA
E335-1 & E335-2-35



Tested and certified
by WQA against NSF/
ANSI 372 for lead free
compliance.

Recommendations for 240 V models are correct if installed with 240 V service.
Increase one model size if unit will be installed with 208 V service.
Call Stiebel Eltron at 800.582.8423 if you have any sizing questions, or if you have any out-of-the-ordinary situation. Stiebel Eltron service representatives can make recommendations on sizing, or provide assistance with our water heaters, to both homeowners and professional installers.

Technical Data



Certified to ANSI/UL Std. 499
Conforms to CAN/CSA E335-1 & E335-2-35



Tested and certified by WQA
against NSF/ANSI 372 for lead
free compliance.



Model	DHC 3-1	DHC 3-2		DHC 4-2		DHC 4-3	DHC 5-2		DHC 6-2		DHC 8-2		DHC 9-3	DHC 10-2	
Item no.	074050	074052		074053		074051	074054		074424		074055		232204	074056	
Phase - 50/60 Hz	1														
Voltage	120 v	240 v	208 v	240 v	208 v	277 v	240 v	208 v	240 v	208 v	240 v	208 v	277 v	240 v	208 v
Wattage	3.0 kW	3.3 kW	2.5 kW	3.8 kW	2.9 kW	4.5 kW	4.8 kW	3.6 kW	6.0 kW	4.5 kW	7.2 kW	5.4 kW	9.0 kW	9.6 kW	7.2 kW
Amperage	25 A	14 A	12 A	16 A	14 A	17 A	20 A	18 A	25 A	22 A	30 A	26 A	32.5 A	40 A	35 A
Min. recommended circuit breaker size ¹	25 A	15 A	15 A	20 A	15 A	20 A	20 A	20 A	25 A	25 A	30 A	30 A	35 A	40 A	35 A
Min. recommended wire size ²	10 AWG	14 AWG	14 AWG	12 AWG	14 AWG	12 AWG	12 AWG	12 AWG	10 AWG	10 AWG	10 AWG	10 AWG	8 AWG	8 AWG	8 AWG
Minimum water flow to activate unit	0.32 GPM 1.2 l/min	0.32 GPM 1.2 l/min		0.42 GPM 1.6 l/min		0.42 GPM 1.6 l/min	0.42 GPM 1.6 l/min		0.47 GPM 1.8 l/min		0.69 GPM 2.6 l/min		0.79 GPM 3.0 l/min		0.79 GPM 3.0 l/min
Weight	4.6 lb / 2.1 kg	5.3 lb / 2.4 kg		5.3 lb / 2.4 kg		4.6 lb / 2.1 kg	4.6 lb / 2.1 kg		4.6 lb / 2.1 kg		5.3 lb / 2.4 kg		5.3 lb / 2.4 kg		5.3 lb / 2.4 kg
Dimensions (H x W x D)	14 ³ / ₁₆ " / 36.0 cm x 7 ⁷ / ₈ " / 20.0 cm x 4 ¹ / ₈ " / 10.4 cm														
Nominal water volume	0.13 gal / 0.5 l														
Working pressure	150 psi / 10 BAR														
Tested to pressure	300 psi / 20 BAR														
Water connections ³	1/2" NPT														

DHC 3-1, 3-2, 4-2 ship with a 0.5 GPM pressure compensating flow-reducer/aerator that must be installed.


¹ This is our recommendation for overcurrent protection sized at 100% of load (DP for 240/208/277 v & SP for 120 v models).

Check local codes for compliance if necessary. Tankless water heaters are considered a non-continuous load.

² Copper must be used. Conductors should be sized to maintain a voltage drop of less than 3% under load.

³ Suitable for supply with cold water only.

Temperature Rise vs. Flow Rate at Maximum Rated Voltage

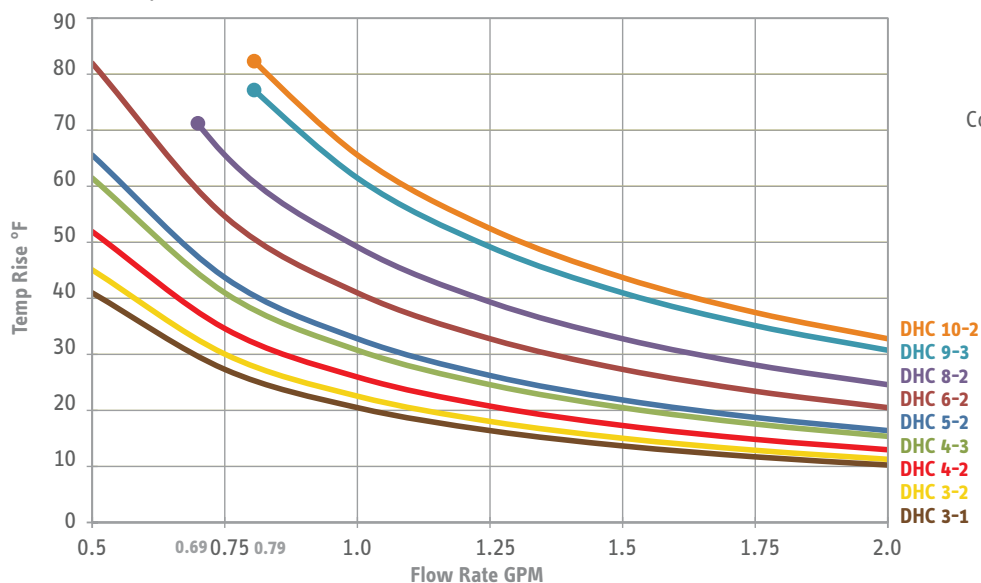

7 years leakage
& 3 years parts.
Complete warranty
online.



Limited Warranty (Excerpt): Subject to the terms and conditions set forth in this limited warranty, Stiebel Eltron, Inc. hereby warrants to the original purchaser that each Tankless Electric Domestic Hot Water Heater shall not (i) leak due to defects in the Manufacturer's materials or workmanship for a period of seven (7) years from the date of purchase or (ii) fail due to defects in the Manufacturer's materials or workmanship for a period of three (3) years from the date of purchase. Complete warranty details available online.

Due to our continuous process of engineering and technological advancement, specifications may change without notice.

STIEBEL ELTRON

17 West Street
West Hatfield, MA 01088

TOLL FREE 800.582.8423

PHONE 413.247.3380

FAX 413.247.3369

info@stiebel-eltron-usa.com

www.stiebel-eltron-usa.com

Printed on recycled chlorine-free paper with soy-based inks. #20-8.2015